


Calcmeter 4040 Pro Analysis Software

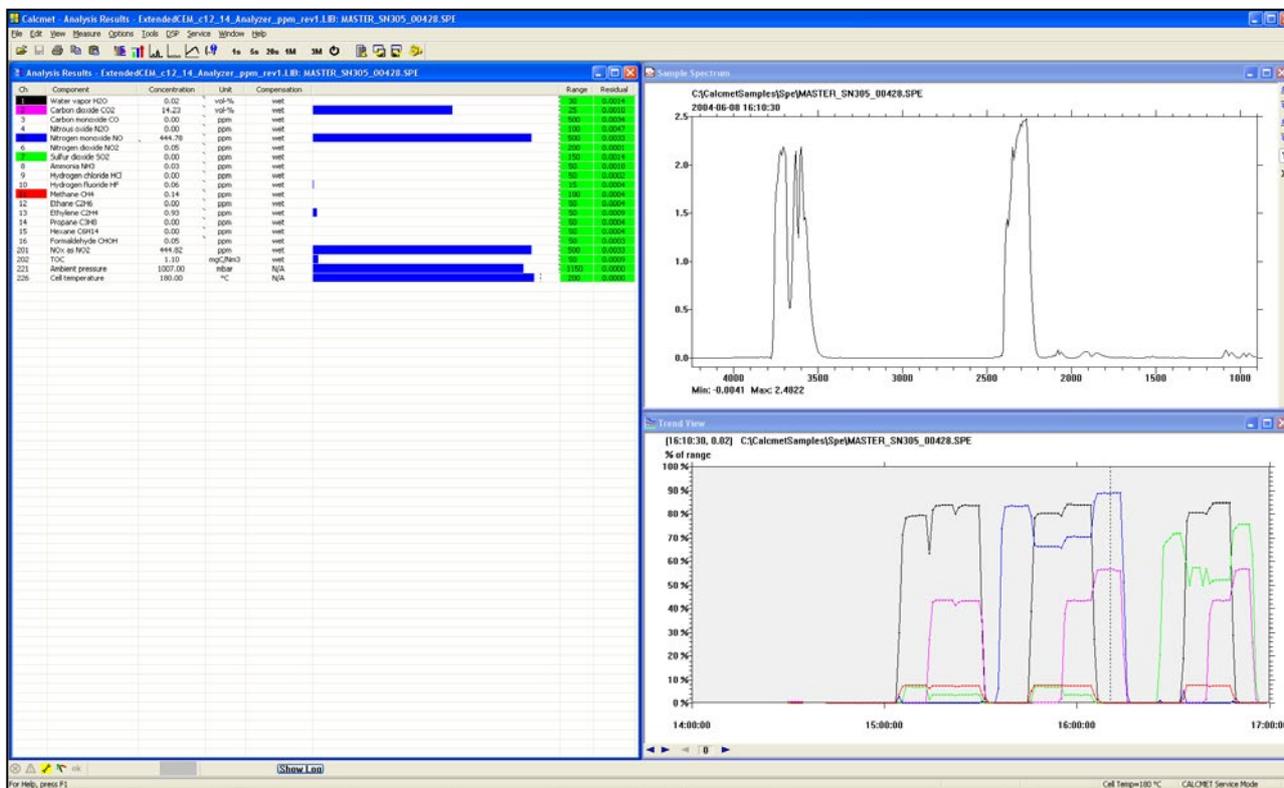

Analysis and Control Software for DX4040 FTIR Gas Analyzers

Calcmeter provides an easy to use interface to the FTIR gas analyser, stores and visualises the sample spectra, and performs the multicomponent analysis using Gasmeter Technologies Oy's patented modified classical least squares algorithm.

Calcmeter 4040 comes with Calcmeter 4040 Professional software, which is installed into external computer. Calcmeter 4040 PRO version is connected to Gasmeter DX4040 gas analyzer with RS-232 port and it can be used to measure and analyse sample spectra on-line with DX4040 models.

General parameters

- Operating system:** Windows 7 (32-bit) operating system.
- Hardware requirements:** 512 MB Memory, > 40 GB hard disk, > 2.4 GHz Intel Pentium IV processor, DVD-RW, Modem, Network card, RS-232, and USB ports
- Analysis principle:** Modified classical least squares
- Performance:** Simultaneous analysis of up to 50 gas compounds. Data Acquisition, analysis of 20 gases and output in < 1000 ms
- Data storage:** Automatic saving of sample spectra with options for saving only when a specific condition is met (concentration / residual)
Spectrum file size 4.3 kb in Calcmeter spectrum file format

Input/output options

Analyzer control:	RS-232 COM port
Expansion cards:	AdLink PCI expansion cards (up to a total of eight cards) <ul style="list-style-type: none"> - PCI-6208 analog output - PCI-7230 digital input /output - PCI-7250/51 relay output - PCI-9112 analog input AdLink ISA expansion cards (up to a total of three cards) <ul style="list-style-type: none"> - ACL-7225 relay output Advantech DA&C unit via Ethernet (up to eight modules) Beckhoff TwinCAT (up to 255 modules)
Serial output:	MODBUS (other FieldBus formats as an option) COMLI ASCII (proprietary format)

Analytical performance

Data acquisition time:	1 – 500 seconds, time weighted average of individual scans lasting 100 ms each. The acquisition time may be shortened to under one second. Data acquisition may be configured for any interval or for sampling from multiple sample streams
Detection limit:	< 3 x spectral baseline noise
Linearity deviation:	< 2 % of reference concentration
Linearity correction:	Automatic, multi-point fitting of calibration curve
Cross interference:	< 4 % of reference concentration, cross-interfering components are included in multicomponent analysis
Quality assurance:	Residual absorbance from analysis is monitored and results invalidated if residual is too high
Supported file formats:	Gasmeter sample spectra (.spe) Gasmeter reference spectra (.ref) Gasmeter background spectra (.bkg) Gasmeter interferogram file (.ifg) ASCII x-y table (.txt) JCAMP-DX (.dx)

Properties of the Calcmet 4040 Pro version

Calcmet 4040 Professional version is used only with Gasmeter DX4040 models

	4040 Pro
Analyzer specific software (Serial number identification)	X
FTIR measurement by external computer	X
50 gas multicomponent analysis	X
Support for inputs and outputs	X
Identification of gas components using Library Search routine	X
Identification of gas components using Advanced Library Search routine	X
250 component spectra library CWA not included	X
English language	X
Simple mode	X
Possibility to use NIST library (requires a separate NIST library option)	X
Match functions & Logic functions	X
Peak marking, Savitsky-Golay smoothing, deconvolution	X

End user licence

Pro version:	Single user licence, protected with a HASP USB key. Analyzer specific software according to analyser serial number and protection code.
---------------------	---

Gasmeter Technologies Oy shall not be liable for technical or editorial errors or omissions contained herein. The information in this document is provided "as is" without warranty of any kind and is subject to change without notice. Should you find any errors, we would appreciate if you notified us.